


MDF70-165-8HD

Direct Drive 380V Automation for Sprung Roller Shutters

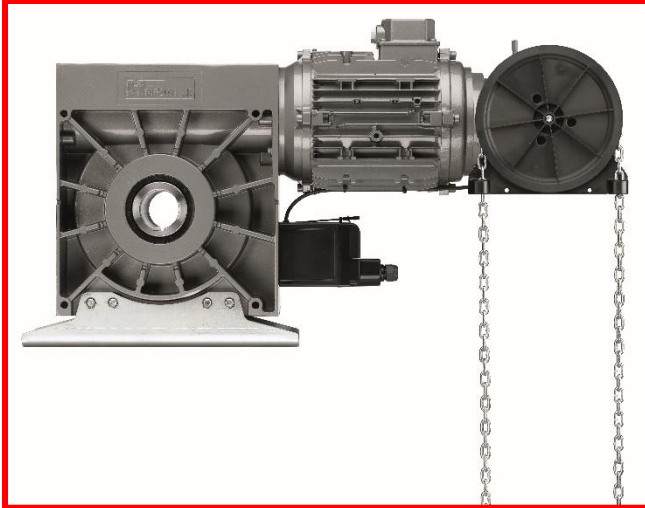

DIRECT DRIVE
Quality High Use
Automation
For Spring Balanced
Roller Shutters

FEATURES

- High Use (HD)
- Integrated Programmable limits system
- Crank or Chain Manual Override Options
- Integrated Safety Catch
- Robust, Strong & Durable
- Wide Range of Control Options
- 3 Phase 380V
- Thermal Overload Protection
- Higher Torque Models available up to 2000 Nm

SPECIFICATIONS

VOLTAGE	380V AC @ 50 Hz (Three Phase)
CURRENT INPUT	8.5 A
TORQUE	1650 Nm
MOTOR OUTPUT	2.2 kW
SPEED	8 Rpm
DUTY CYCLE	30 operations / Hour (Dependent on door size)
SHAFT DIAMETER	55 mm (16mm keyway)
PROTECTION	IP54
DIMENSIONS	766 x 194 x 471mm
WEIGHT	72 Kg

(The Company reserves the right to amend product specifications and information without notice.)

PLEASE CONTACT OUR SALES TEAM +(27) 31 700 8260 for further information.

PART OF THE MARANTEC COMPANY GROUP
OPENING DOORS IN SOUTH AFRICA

PROUD SUPPORTERS AND SUPPLIERS OF

