


MTZ-FU 30-18-120 HD Specialized High Speed Door Operator

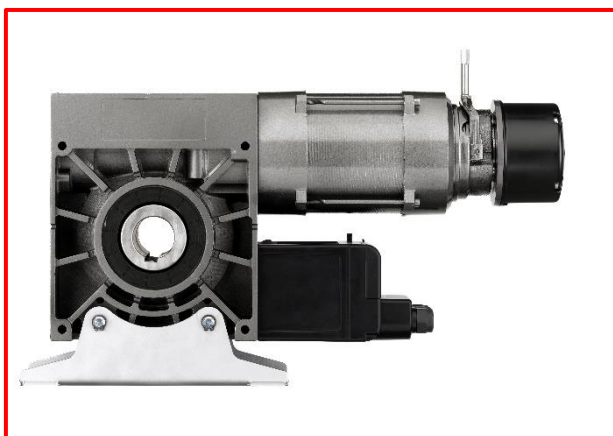

HIGH-SPEED DOOR DRIVE
For Operation With a
Frequency Convertor

FEATURES

- Heavy Duty (HD)
- High holding force via additional magnetic brake
- Integrated Safety Catch
- Programmable limits (AWG)
- Emergency hand crank or hand chain for emergency operation
- Straightforward conversion from crank to chain
- Thermal overload protection
- Higher Torque models available
- Custom versions on request

SPECIFICATIONS

VOLTAGE	400V AC @ 50Hz (Three Phase)
CURRENT RATING	7.0 A
DRIVE TORQUE	180Nm @ 50Hz (126Nm @ 87Hz)
MOTOR OUTPUT	3.0 kW
DUTY CYCLE	45 operations / Hour (Dependent on door size)
SHAFT DIAMETER	25.4mm or 30mm (8mm keyway)
PROTECTION	IP54
DIMENSIONS	536 x 122 x 335mm
WEIGHT	37 Kg
TEMPERATURE RANGE	-20° to +60°C

(The Company reserves the right to amend product specifications and information without notice.)

PLEASE CONTACT OUR SALES TEAM for further information.

PART OF THE MARANTEC COMPANY GROUP - OPENING DOORS IN SOUTHERN AFRICA

PROUD SUPPORTERS AND SUPPLIERS OF:

marantec
drive technology

